

HMR 400 T4 0,75kW (261400640)

GENERAL DATA



LONG CASED FAN WITH BACKWARD TURBINE

MANUFACTURING FEATURES:


- Reinforced fan casing manufactured in rolling steel sheet. Polyester powder finishing coat. Housing with motor access door.
- High efficiency backward impeller with self-cleaning system in steel sheet, balanced static and dynamically in origin.
- Standard asynchronous squirrel-cage motor with IP-55 protection and Class F insulation. Standard voltages 230/400V 50Hz .
- Maximum working temperature 60°C.

APPLICATIONS:

Designed for inline installation, they are suitable for:

- Air renewal in buildings and industries.
- Smoke extraction.

PERFORMANCE CURVE

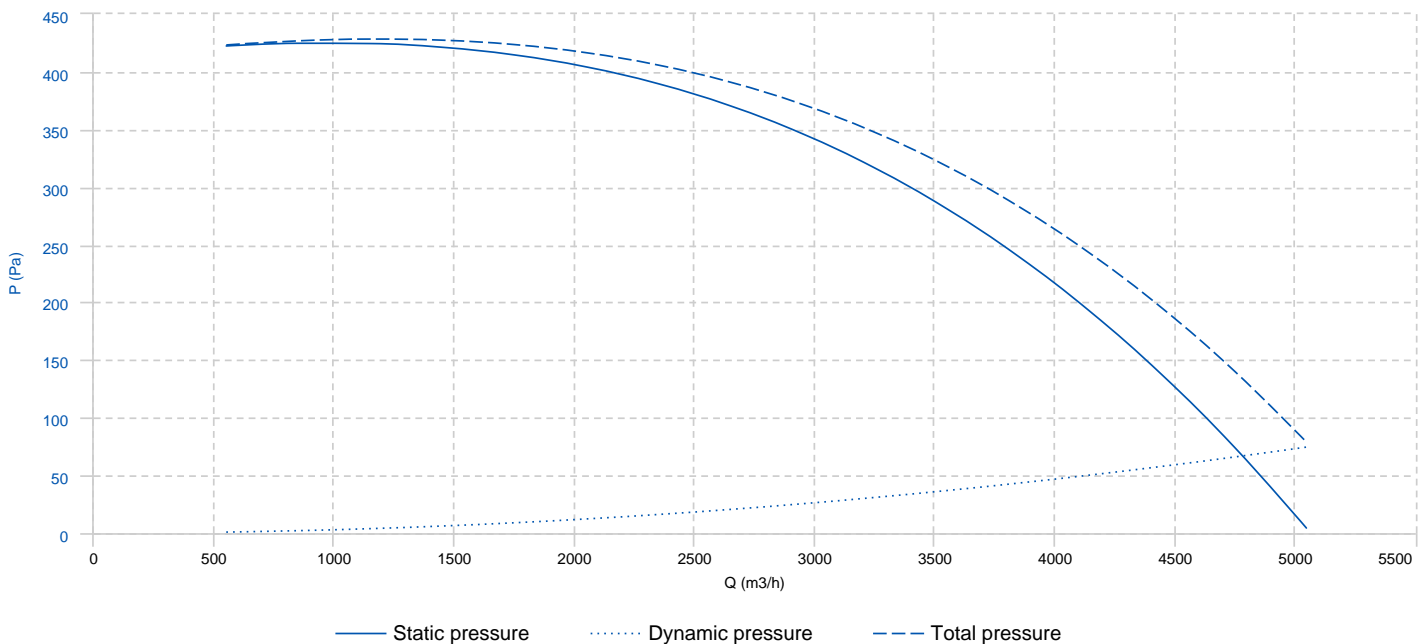


TECHNICAL DATA

Fan

RPM	1390	Approx. weight	84 kg	Max. Flow	5310 m³/h
-----	------	----------------	-------	-----------	-----------


DIMENSIONS

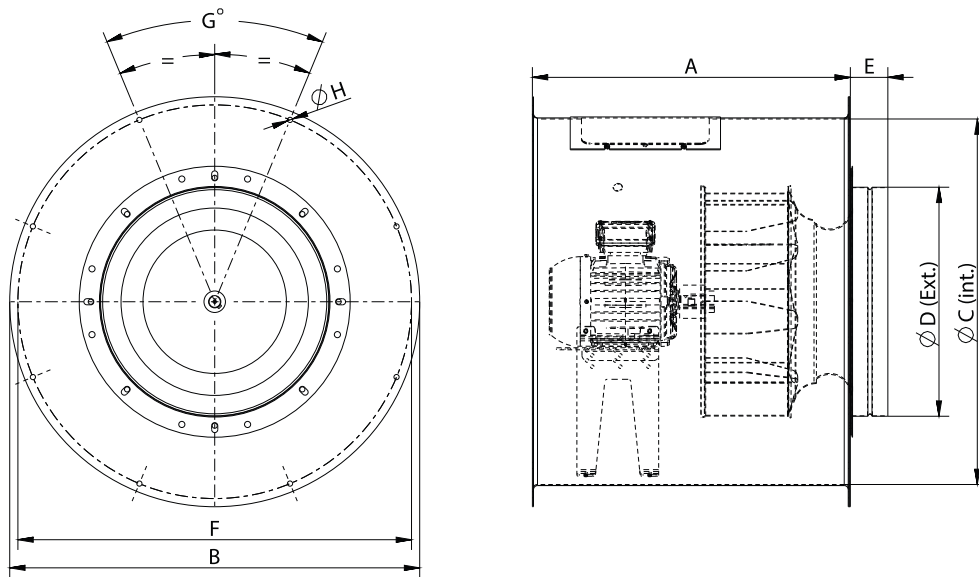

Dimensions (mm)

A	567	ϕB	725	ϕC	633	ϕD	398	E	70
ϕF	690	G	6x60°	ϕH	10,2				

WIRING DIAGRAM

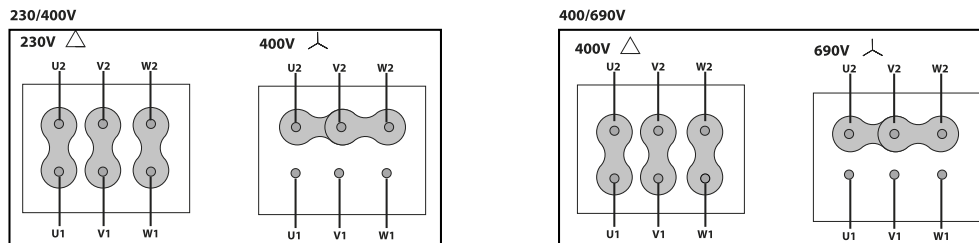

ACCESSORIES



SAFETY SWITCH
INT 6,5 1V
REF: FX452508



INLET-OUTLET PROTECTION GUARD
RP 63
REF: 960330101



OPTIONAL MOUNTING SUPPORT
PO 63
REF: 960001658



FLEXIBLE JOINT
JE 45
REF: 300719201



FREQUENCY SPEED CONTROLLER
SFC M 0,75kW
 REF: 960002522




FREQUENCY SPEED CONTROLLER
SFC T 1,1kW
 REF: 960002528



EMC FILTER
Filtro EMC - SFC T 0,55 a 2,2kW
 REF: 960002527

SPARE PARTS

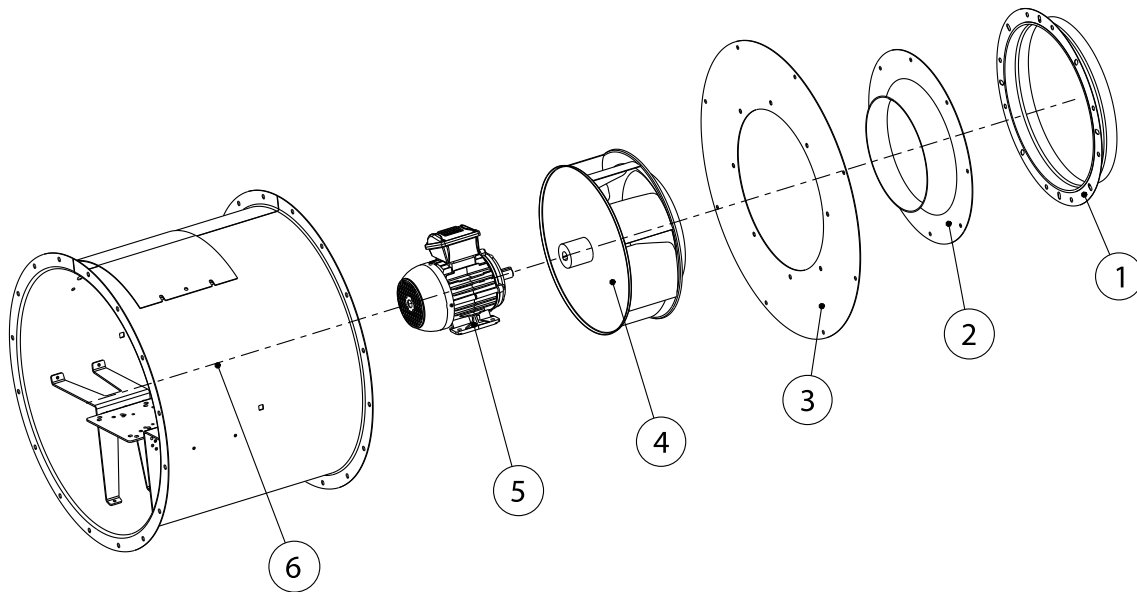

	Code	Family	Model	RPM	Degrees
1	960003212	1 x FLANGE	AC-400	-	-
2	279401680	1 x INLET CONE	ED11 400	-	-
3	261401685	1 x ADAPTATION DISC	HMR400	-	-
4	279409381	1 x TURBINE	THRE R63B1 400X140x19 RD	-	-
5	721001143	1 x MOTOR	0,75kW T4 B3 230/400V	-	-