

HMR 560 T4 3kW (261560640)

GENERAL DATA



LONG CASED FAN WITH BACKWARD TURBINE

MANUFACTURING FEATURES:


- Reinforced fan casing manufactured in rolling steel sheet. Polyester powder finishing coat. Housing with motor access door.
- High efficiency backward impeller with self-cleaning system in steel sheet, balanced static and dynamically in origin.
- Standard asynchronous squirrel-cage motor with IP-55 protection and Class F insulation. Standard voltages 230/400V 50Hz .
- Maximum working temperature 60°C.

APPLICATIONS:

Designed for inline installation, they are suitable for:

- Air renewal in buildings and industries.
- Smoke extraction.

PERFORMANCE CURVE

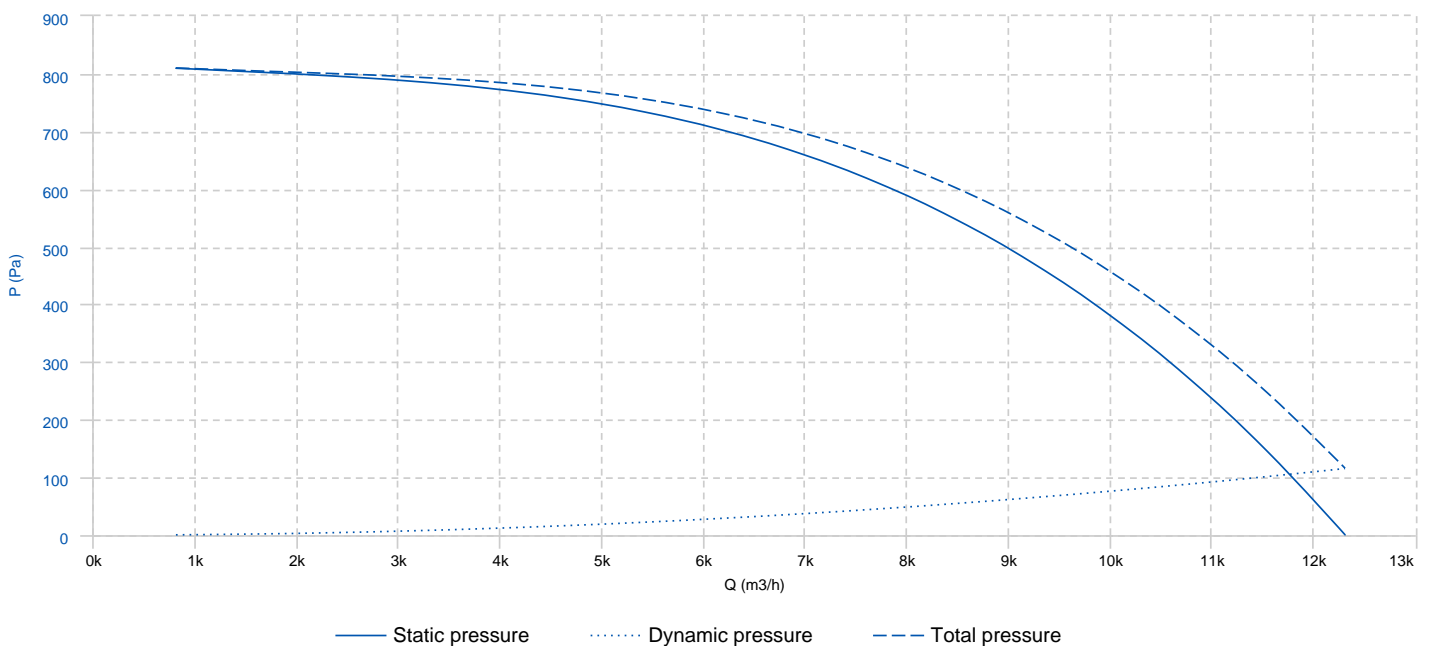


TECHNICAL DATA

Fan

RPM	1430	Approx. weight	194 kg	Max. Flow	12950 m ³ /h
-----	------	----------------	--------	-----------	-------------------------


DIMENSIONS

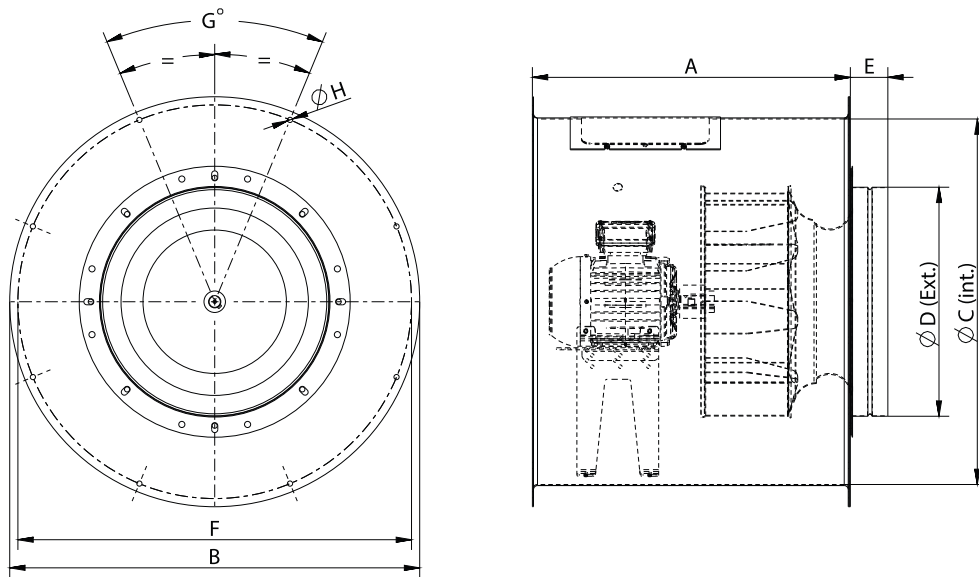

Dimensions (mm)

A	714,5	ϕB	1000	ϕC	903,5	ϕD	548	E	70
ϕF	970	G	8x45°	ϕH	10,2				

WIRING DIAGRAM

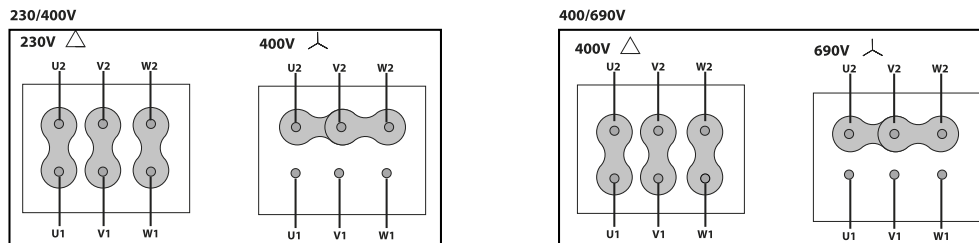

ACCESSORIES



SAFETY SWITCH
INT 6,5 1V
REF: FX452508



INLET-OUTLET PROTECTION GUARD
RP 90
REF: 960340102



OPTIONAL MOUNTING SUPPORT
PO 90
REF: 960001661




FLEXIBLE JOINT
JE 45
REF: 300719201



FREQUENCY SPEED CONTROLLER
SFC T 4kW
 REF: 960002532

SPARE PARTS

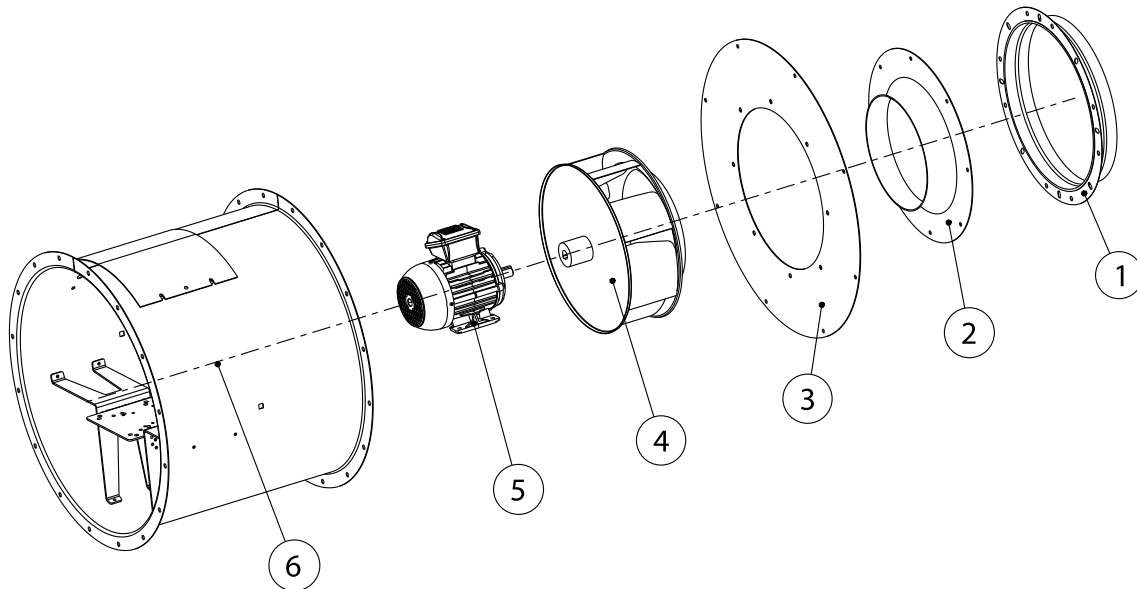

	Code	Family	Model	RPM	Degrees
1	960003215	1 x FLANGE	AC-560	-	-
2	279561680	1 x INLET CONE	ED11 560	-	-
3	261561685	1 x ADAPTATION DISC	HMR560	-	-
4	279569382	1 x TURBINE	THRE R63B1 560X160x28 RD	-	-
5	721001168	1 x MOTOR	3KW T4 B3 230/400V	-	-