

HMR 710 T6 2,2kW (261710660)

GENERAL DATA



LONG CASED FAN WITH BACKWARD TURBINE

MANUFACTURING FEATURES:


- Reinforced fan casing manufactured in rolling steel sheet. Polyester powder finishing coat. Housing with motor access door.
- High efficiency backward impeller with self-cleaning system in steel sheet, balanced static and dynamically in origin.
- Standard asynchronous squirrel-cage motor with IP-55 protection and Class F insulation. Standard voltages 230/400V 50Hz .
- Maximum working temperature 60°C.

APPLICATIONS:

Designed for inline installation, they are suitable for:

- Air renewal in buildings and industries.
- Smoke extraction.

PERFORMANCE CURVE

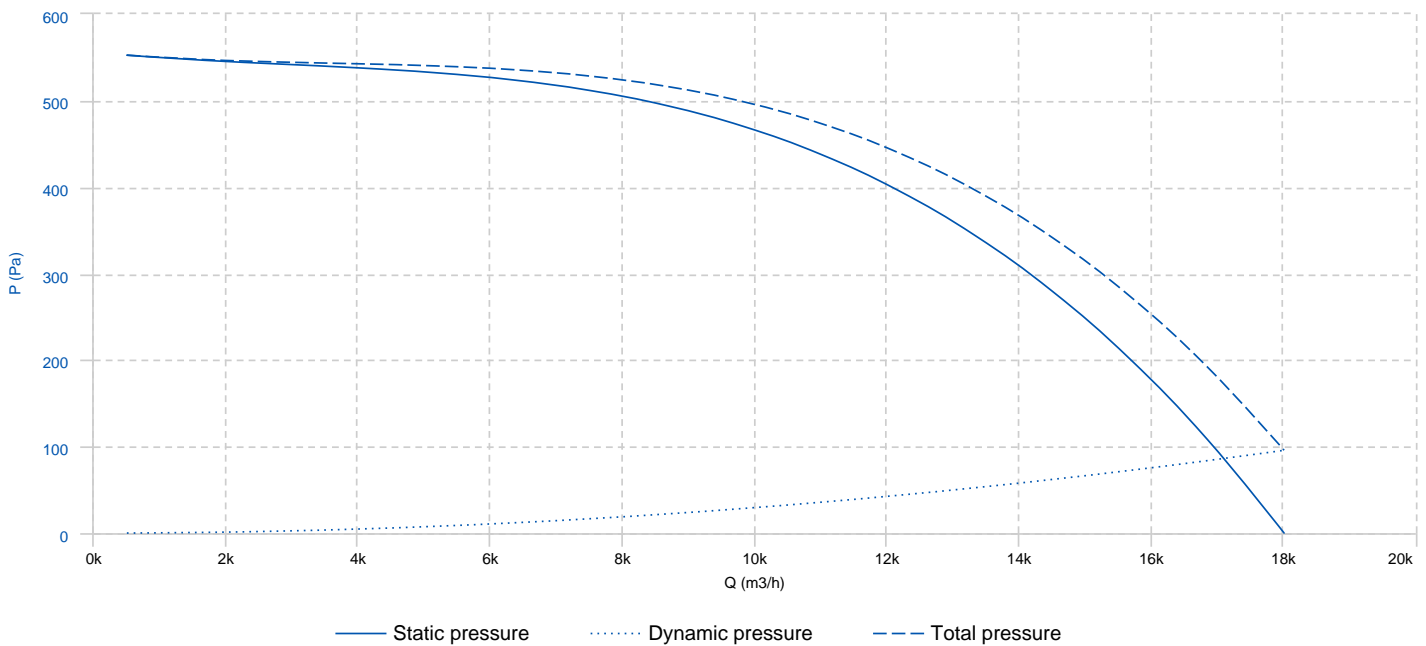


TECHNICAL DATA

Fan

RPM	940	Approx. weight	303 kg	Max. Flow	18980 m³/h
-----	-----	----------------	--------	-----------	------------


DIMENSIONS

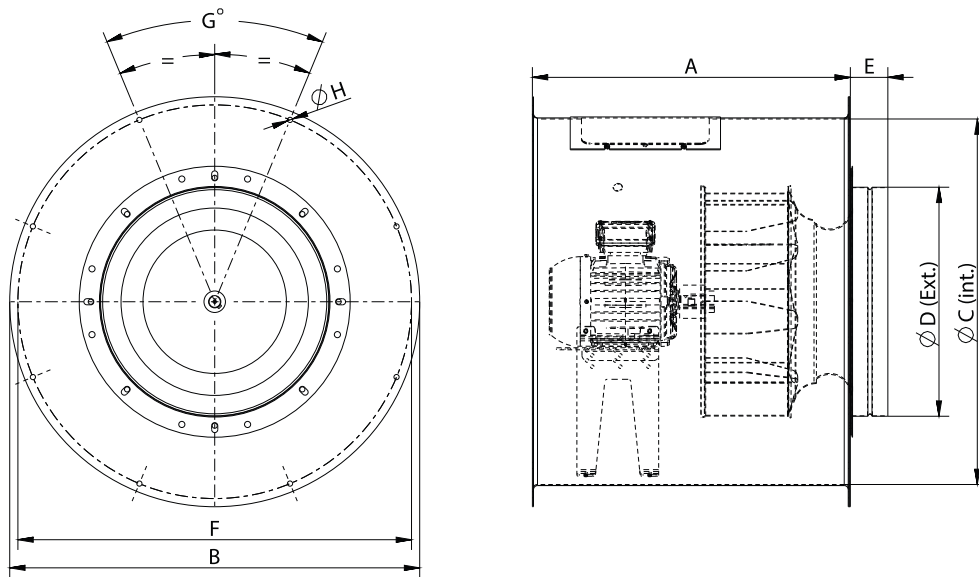

Dimensions (mm)

A	890	ϕB	1234	ϕC	1132	ϕD	698	E	70
ϕF	1190	G	8x45°	ϕH	10,2				

WIRING DIAGRAM

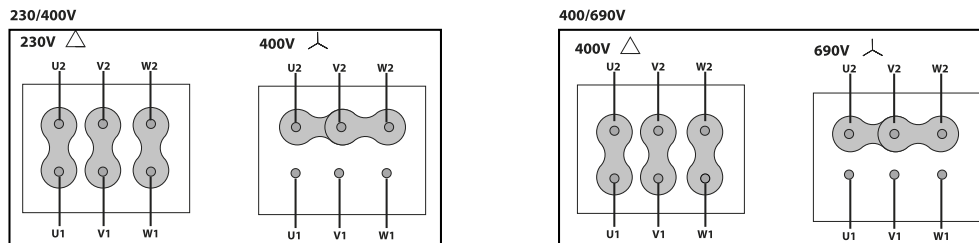

ACCESSORIES



SAFETY SWITCH
INT 6,5 1V
REF: FX452508



OPTIONAL MOUNTING SUPPORT
PO 112
REF: 960001664



FLEXIBLE JOINT
JE 45
REF: 300719201




INLET-OUTLET PROTECTION GUARD
RP 112
REF: 960340105



FREQUENCY SPEED CONTROLLER
SFC T 3kW
 REF: 960002530

SPARE PARTS

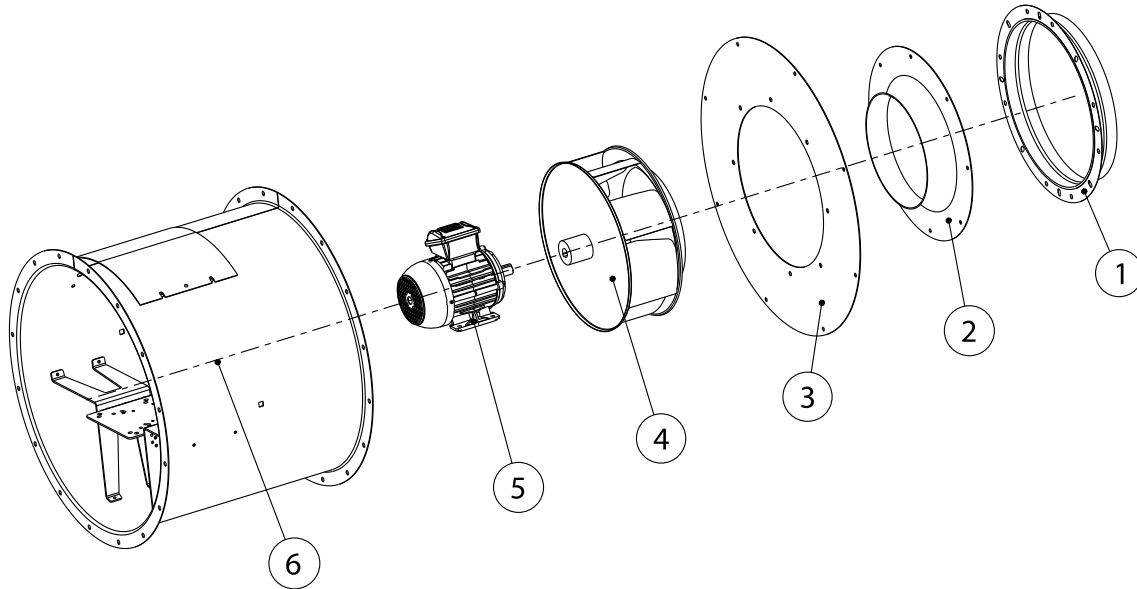

	Code	Family	Model	RPM	Degrees
1	960003217	1 x FLANGE	AC-710	-	-
2	279711680	1 x INLET CONE	ED11 710	-	-
3	261711685	1 x ADAPTATION DISC	HMR710	-	-
4	279719381	1 x TURBINE	THRE R63B2 710X224x28 RD	-	-
5	721001260	1 x MOTOR	2,2kW T6 B3 230/400V	-	-