

HMR 800 T6 4kW (261800660)

GENERAL DATA



LONG CASED FAN WITH BACKWARD TURBINE

MANUFACTURING FEATURES:


- Reinforced fan casing manufactured in rolling steel sheet. Polyester powder finishing coat. Housing with motor access door.
- High efficiency backward impeller with self-cleaning system in steel sheet, balanced static and dynamically in origin.
- Standard asynchronous squirrel-cage motor with IP-55 protection and Class F insulation. Standard voltages 230/400V 50Hz .
- Maximum working temperature 60°C.

APPLICATIONS:

Designed for inline installation, they are suitable for:

- Air renewal in buildings and industries.
- Smoke extraction.

PERFORMANCE CURVE

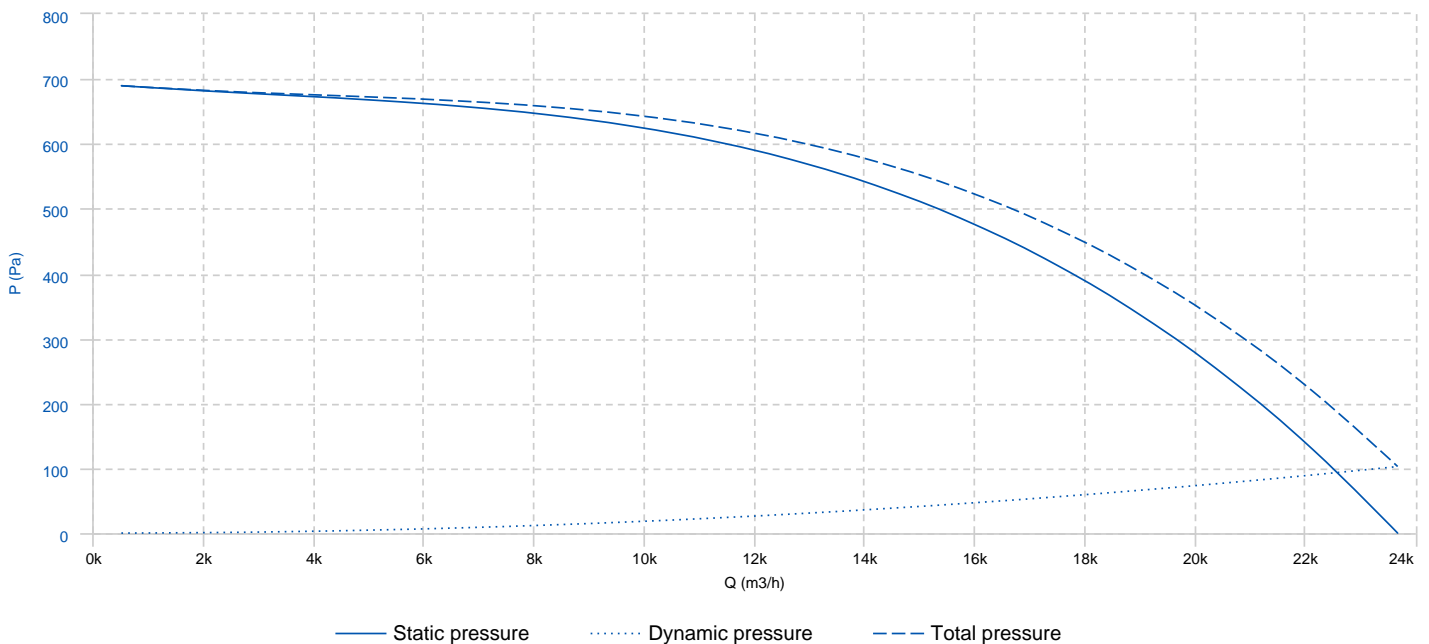


TECHNICAL DATA

Fan

RPM	960	Approx. weight	363 kg	Max. Flow	24950 m³/h
-----	-----	----------------	--------	-----------	------------


DIMENSIONS

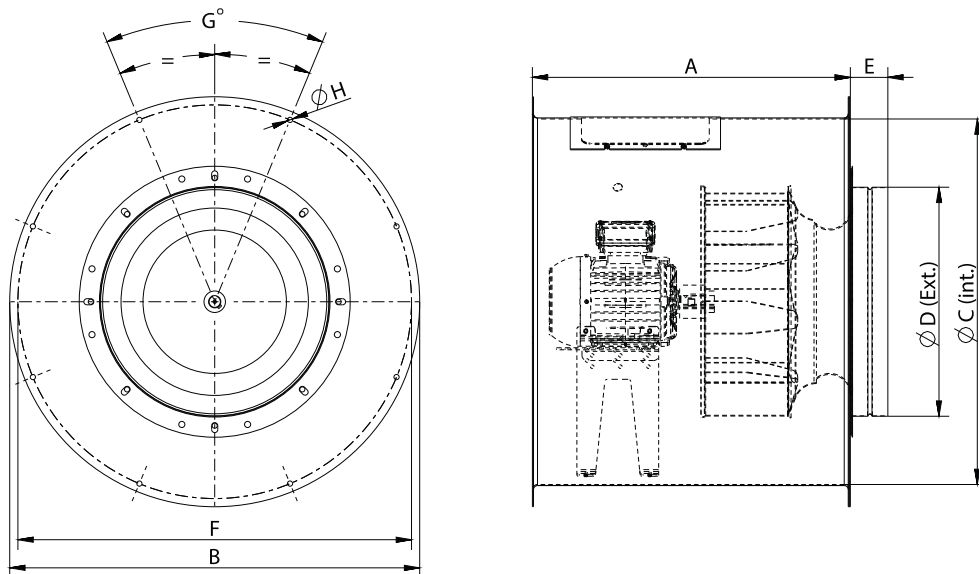

Dimensions (mm)

A	930	ϕB	1365	ϕC	1263	ϕD	798	E	70
ϕF	1320	G	10x36°	ϕH	10,2				

WIRING DIAGRAM

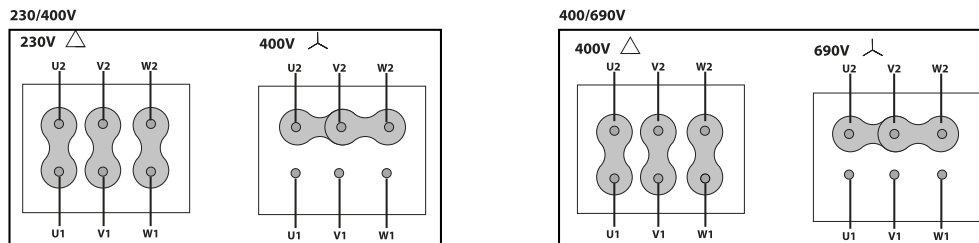

ACCESSORIES



INLET-OUTLET PROTECTION GUARD
 RP 125
 REF: 960340104



FLEXIBLE JOINT
 JE 45
 REF: 300719201



OPTIONAL MOUNTING SUPPORT
 PO 125
 REF: 960001663




SAFETY SWITCH
 INT 15 1V
 REF: FX025956



FREQUENCY SPEED CONTROLLER
SFC T 4kW
 REF: 960002532

SPARE PARTS

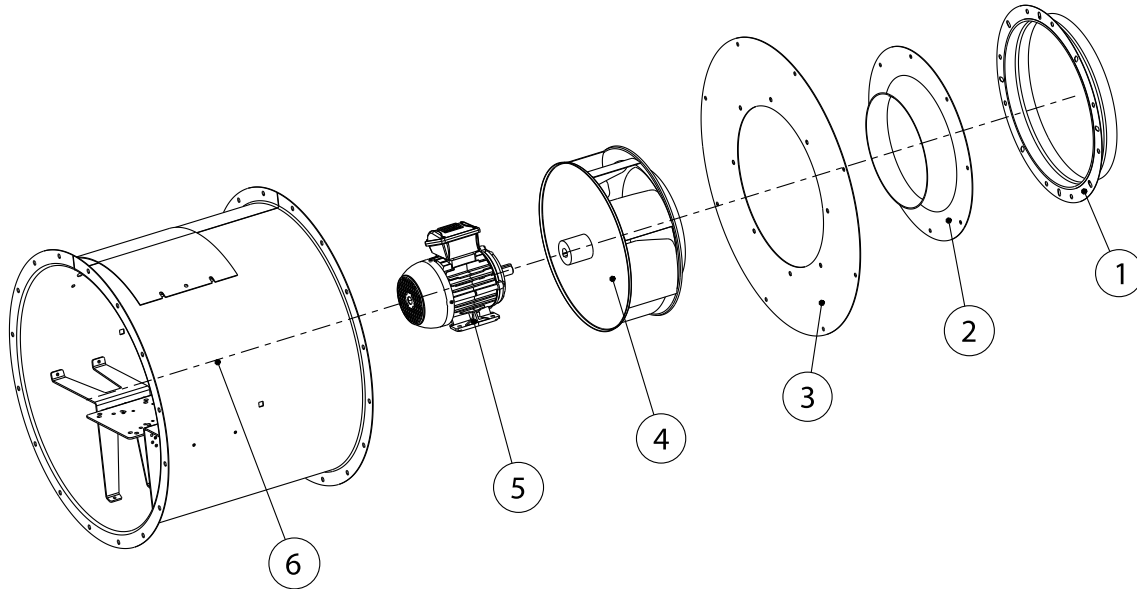

	Code	Family	Model	RPM	Degrees
1	960003218	1 x FLANGE	AC-800	-	-
2	279801680	1 x INLET CONE	ED11 800	-	-
3	261801685	1 x ADAPTATION DISC	HMR800	-	-
4	279809381	1 x TURBINE	THRE R63B2 800X224x38 RD	-	-
5	721001270	1 x MOTOR	4KW T6 B3 230/400V	-	-